


Material:



Aluminium EN AW
6060/6063/6005 T6/T66

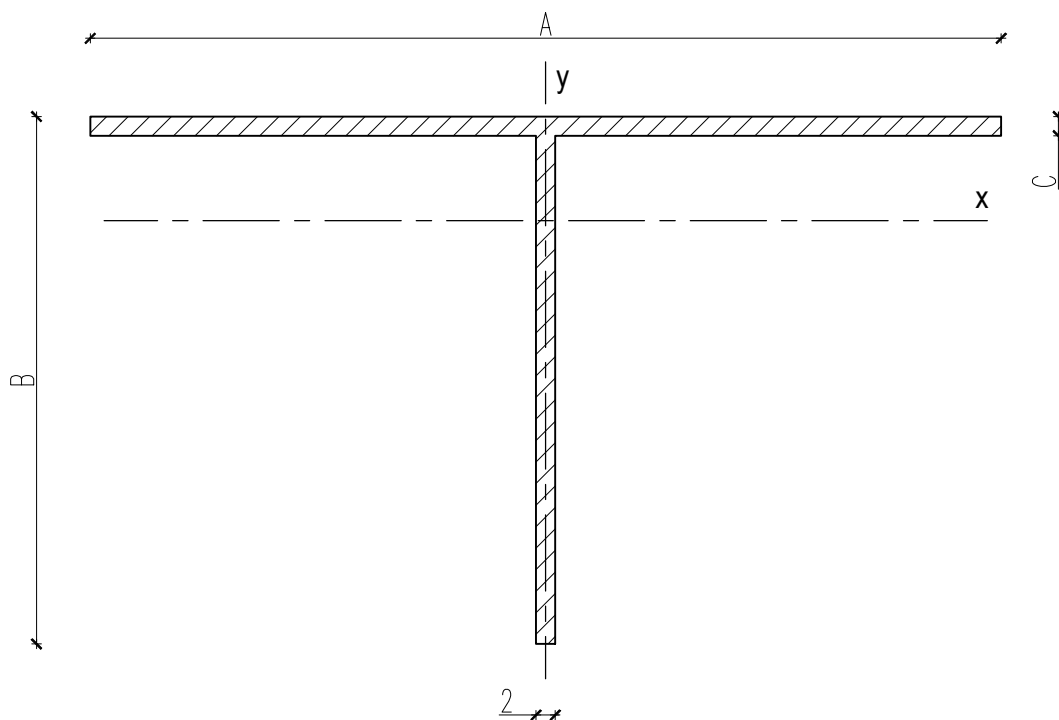

Tolerancja wymiarów wynosi ($\pm 0,2$) mm.

Nazwa profilu	A [mm]	B [mm]	C [mm]
ARTRYS T PROFILE - ATP 105/55/1,5/2	105	55	1,5
ARTRYS T PROFILE - ATP 95/55/1,5/2	95	55	1,5
ARTRYS T PROFILE - ATP 135/55/2	135	55	2
ARTRYS T PROFILE - ATP 105/55/2	105	55	2
ARTRYS T PROFILE - ATP 95/55/2	95	55	2
ARTRYS T PROFILE - ATP 75/55/2	75	55	2
ARTRYS T PROFILE - ATP 95/45/2	95	45	2
ARTRYS T PROFILE - ATP 95/35/2	95	35	2

Nazwa profilu	Jx [cm ⁴]	Jy [cm ⁴]	Wx [cm ³]	Wy [cm ³]	A [cm ²]	Masa [kg/m]
ARTRYS T PROFILE - ATP 105/55/1,5/2	14,47	7,37	1,71	2,76	2,65	0,72
ARTRYS T PROFILE - ATP 95/55/1,5/2	10,72	7,18	1,69	2,26	2,49	0,68
ARTRYS T PROFILE - ATP 135/55/2	41,01	8,25	1,78	6,08	3,76	1,02
ARTRYS T PROFILE - ATP 105/55/2	19,30	7,82	1,75	3,68	3,16	0,86
ARTRYS T PROFILE - ATP 95/55/2	14,29	7,63	1,73	3,01	2,96	0,8
ARTRYS T PROFILE - ATP 75/55/2	7,18	7,03	1,69	1,88	2,56	0,7
ARTRYS T PROFILE - ATP 95/45/2	14,29	4,33	1,17	3,01	2,76	0,75
ARTRYS T PROFILE - ATP 95/35/2	14,29	2,11	0,71	3,01	2,56	0,7

WIDOK 3D

